


Simpex Electronic AG Binzackerstrasse 33 CH-8622 Wetzikon Telefon +41-44-931 10 30 Telefax +41-44-931 10 31

www.simpex.ch contact@simpex.ch

CHE-108.018.777 MWST






Casing material:Thermoplastic in black color, UL 94 V-0Impeller materialThermoplastic in black color, UL 94 V-0Protection degree:IP20, according to EN 60529 standard

Fixing system: by No 4 M4 screws

Motor protection: Impedance

Storage temperature:from -40°C to +75°CRated temperature range:from -30°C to +70°CLifetime L10 at 40°C:ball bearing 50,000 hElectrical connection:2 leads 24 AWG UL1430

Approvals: CE
Weight: 0.270 kg

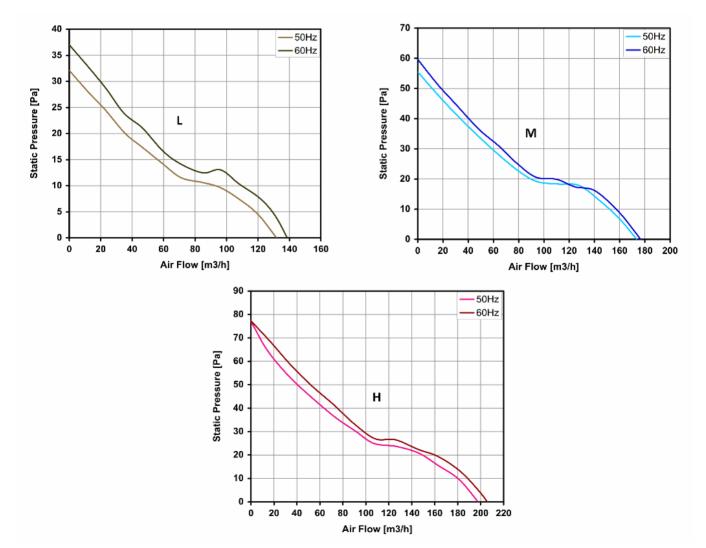

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.





Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
E12B23HWBL00	Ball	230 V a.c.	50/60	0.05/0.05	6.0/6.0	198/206	79/77	45.0/46.8	3,000/3,100	CE
E12B23LWBL00	Ball	230 V a.c.	50/60	0.03/0.03	2.5/2.5	132/138	32/37	34.0/35.7	2,000/2,100	CE
E12B23MWBL00	Ball	230 V a.c.	50/60	0.04/0.04	4.0/4.0	169/176	55/58	40.0/41.8	2,500/2,700	CE

data with uncertainty of 15%